

SURVEY READING — LEVELS

Contours from the survey (+4' ... +28'), grouped into four bands. Everything below is measured off the drawing.



FOUR BANDS (ground area inside the traced site edge)

- 0' → +4' base ≈31,700 sq ft — flattest: NW pocket, S edge, Press Club
- +4' → +12' lower slope ≈35,800 sq ft — gentle on the S, a steep bank on the NE
- +12' → +28' flanks ≈17,200 sq ft — contours 4' apart at ~10–15' spacing: steep
- +28' summit ≈20,000 sq ft — a broad plateau with existing structures

WHAT THIS MEANS FOR ZONING


- Build low** most built program on the 0'–4' base and the gentle S slope — no cutting.
- Keep the flanks** the +12'–+28' band is too steep to build on without regrading.
- Open the top** the summit is already a public place — keep it open.
- NE edge** the ground reaches +4' at the boundary: only a thin bar, stepping.

- 0'–4' base (white = below +4')
- +12'–+28' flanks
- +28' summit
- existing Press Club (outline approx.)

Traced site edge ≈ 105k sq ft (inner boundary line). Handout: 136,530 sq ft, probably to the outer line. Scale read from dimension strings (≈2.68 px/ft at 2000 px width).

DETAILED PROGRAM ZONING

Every program group placed on the band that can take it. Figures = ground available in each zone (not building area).

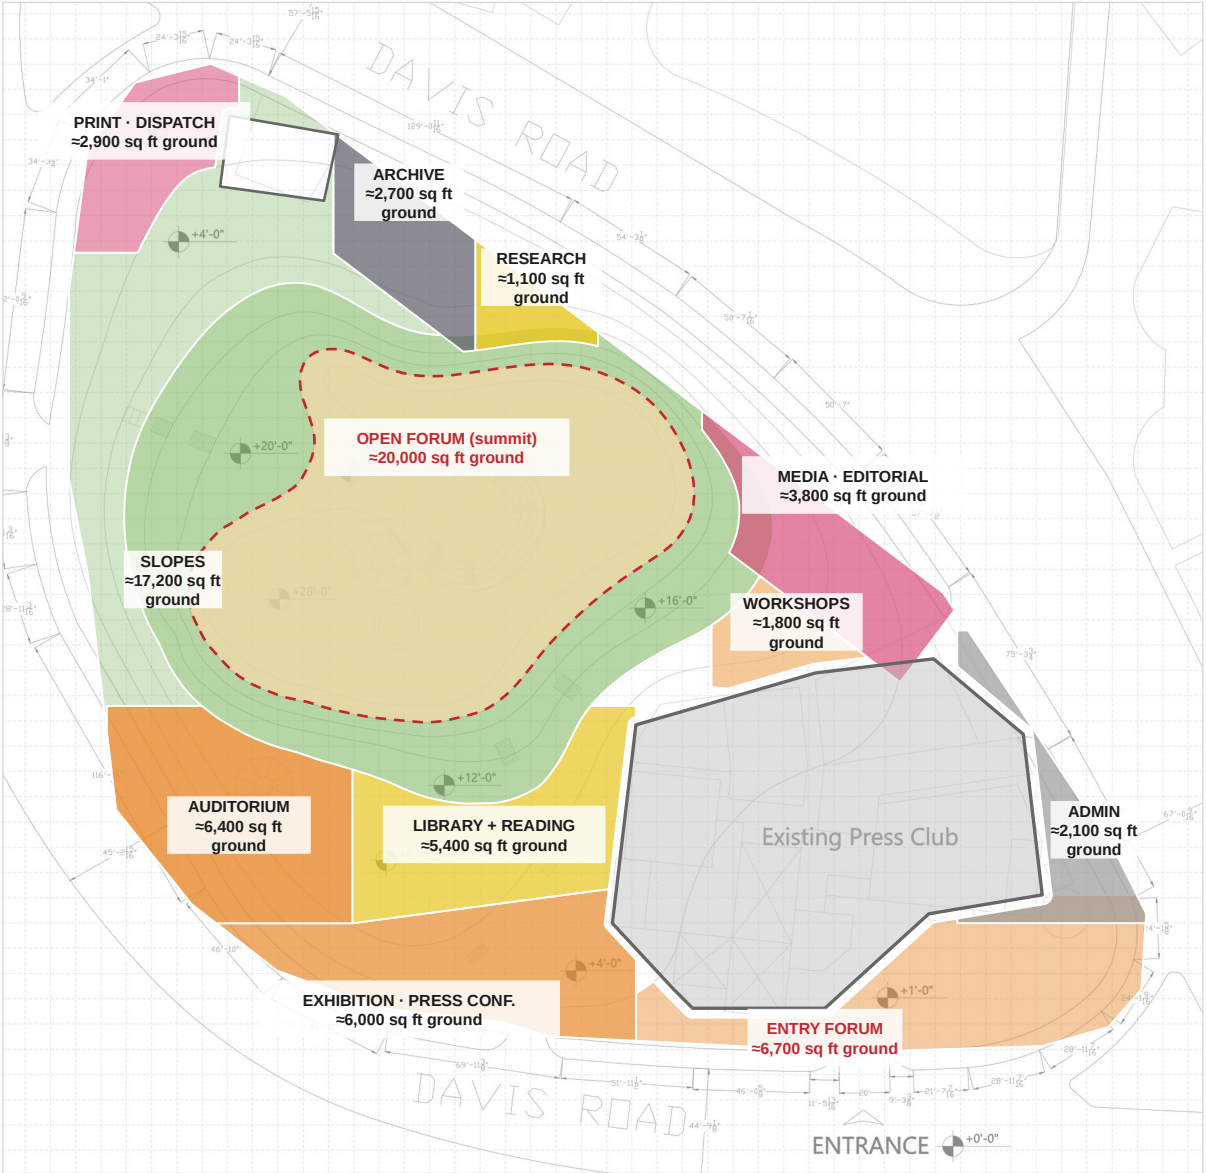

- public / civic
- media / production
- learning
- landscape / slopes
- existing (retained)
- knowledge
- archive (protected)
- admin / service
- open summit

PLACEMENT LOGIC

S base (0'–4') entry forum at the survey's ENTRANCE; exhibition + press conference along Davis Rd S, beside the Press Club.

S slope (+4'–+12') auditorium raked on the SW slope; library + reading on the existing stair route.

NW pocket (+1') print + dispatch with a service yard — the only flat ground away from the entrance.

NE bank archive + research at the NW end, media + editorial at the SE end, next to the Press Club.

E of Press Club workshops (N side) and admin + staff entry (E side).

Flanks + summit no new building: landscape, existing stairs, open forum at +28'.

Existing Press Club retained (outline approximated from the survey's grey linework). NW existing structure kept — use to be decided.

ACCESS + CIRCULATION

Public enters at the surveyed ENTRANCE (+0'); service and staff kept off the public route.



— public — entrance → forum → stairs → summit

— ■ — staff · journalists — E edge → NE bars

..... service — Davis Rd (N end), proposed

ROUTES

Public entrance → entry forum → exhibition foyer → existing S stairs → library → summit. Branches to the auditorium and the W stairs.

Staff + journalists from the entrance past the Press Club's E side → admin → workshops → media → research → archive.

Press Club journalists move directly N into media and W onto the forum.

Service one yard at the NW pocket (+1'); vehicles never enter the S forum. Access point is proposed — not on the survey.

CONFLICTS AVOIDED


Forum staff route peels off E before the crowd.

Summit public only; working bars sit below it on the NE bank.

SECTION A-A' · ENTRANCE SIDE → SUMMIT → DAVIS ROAD N

04

Profile read from the survey contours along line A-A' (slide 01). Vertical scale ×3.

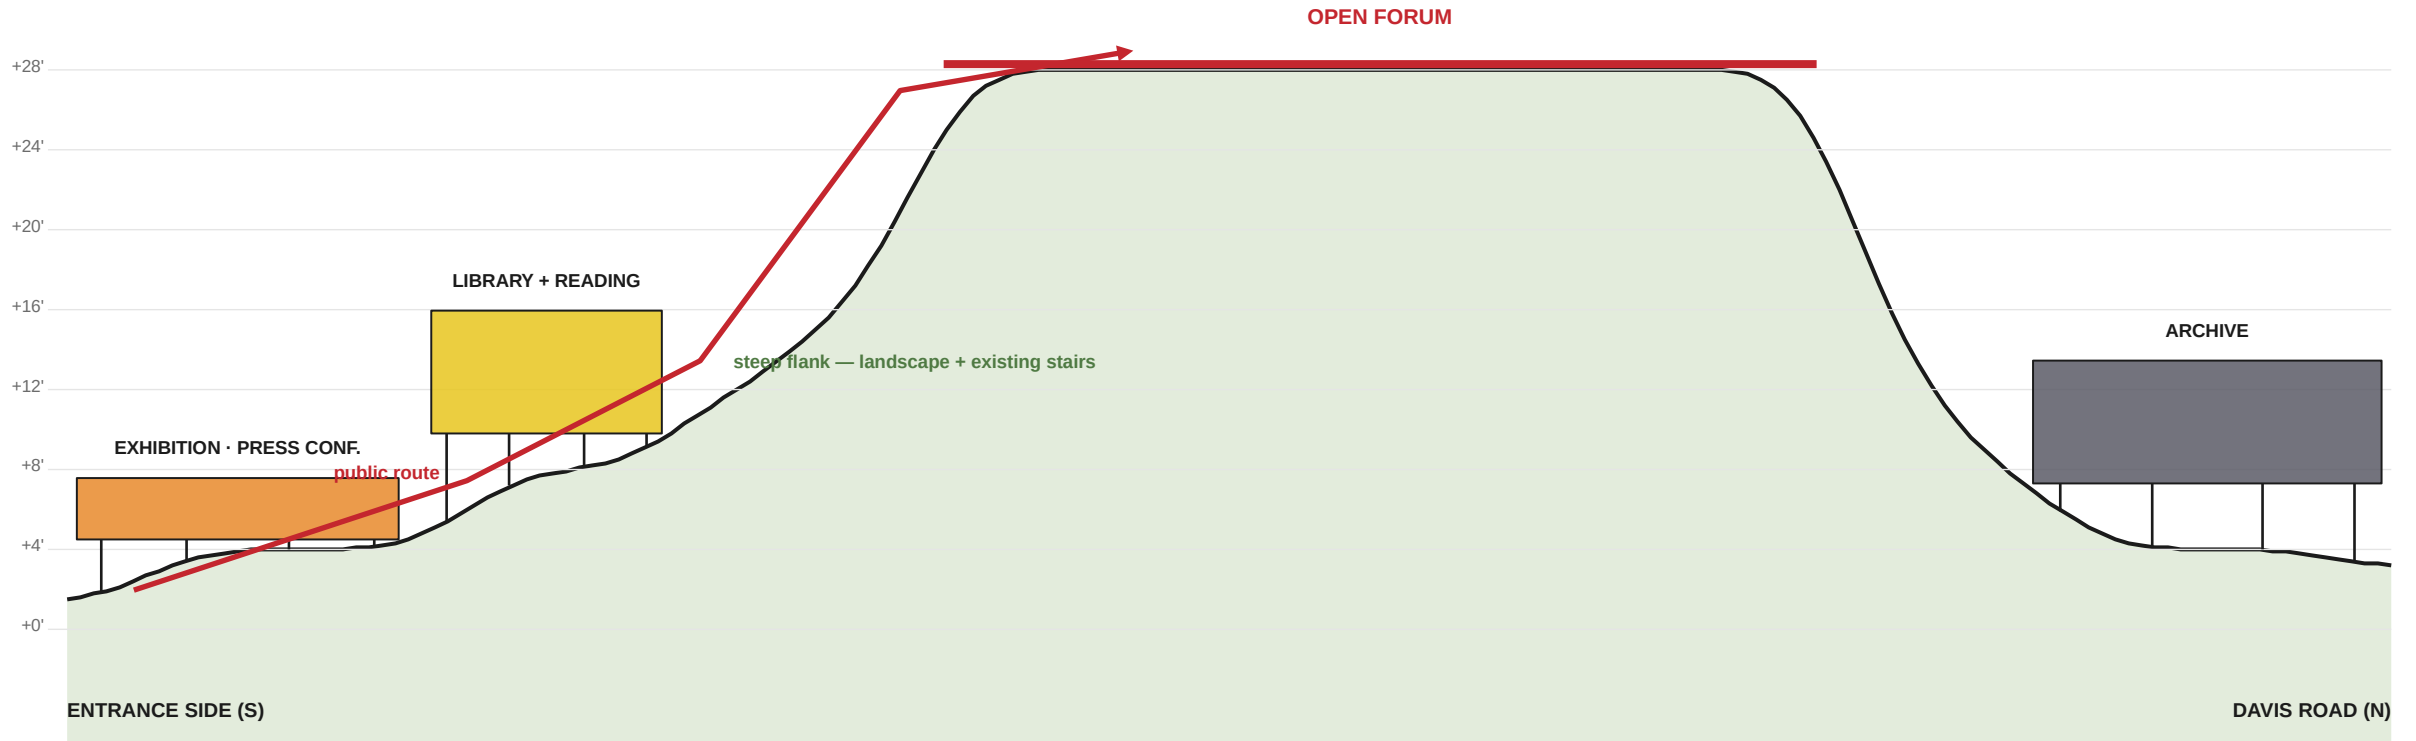

READING THE SECTION

Built program sits where the ground is low or gentle (left: exhibition, library; right: archive on the NE bank). The steep flanks stay landscape; the summit plateau stays an open public forum. Floors step with the ground on piers; nothing is cut or filled.

PROGRAM PLACEMENT SCHEDULE

Where every program item goes, on which level, and why. Areas are ground available — building areas still to be set.

PROGRAM ITEM	ZONE	LEVEL	ACCESS	WHY HERE
Entry forum · arrival · protest edge	S base, at ENTRANCE	±0' – +1'	public	the survey's only marked entrance; Davis Rd S frontage
Exhibition · press conference · forum hall · foyer	S base / lower slope, W of Press Club	+1' – +8'	public	faces the forum and road; next to the Press Club
Auditorium	SW slope	+4' – +12'	semi-public	rake follows the existing slope; foyer at the low end
Public library + reading room	S slope on the existing stairs	+4' – +12'	semi-public	on the public route up; reading terrace faces the summit
Open forum · viewing	summit plateau	+28'	public	already a public top with structures; nothing new built
Archive stores · conservation · consultation	NE bank, NW end	+1' – +12'	private / controlled	beside the service yard; away from the crowd
Research studios · seminar	NE bank, next to archive	+4' – +12'	semi-private	research ↔ archive
Media: newsroom · editorial · recording · broadcast · editing	NE bank, SE end	+4' – +12'	working	next to the Press Club (journalists)
Print · paper store · dispatch · service yard	NW pocket	+1'	private	only flat ground away from the public entrance
Workshops · education	N of Press Club	+4' – +12'	semi-public	between media (skills) and the public side
Admin · staff entry · security	E of Press Club	+1' – +4'	private	on the staff route, close to the entrance
Slopes (+12' – +28')	flanks	—	public landscape	too steep to build without regrading
Existing Press Club	SE	+1' – +8'	existing	retained; linked W to forum, N to media

DETAILED SITE ZONING

Shimla Pahari · Lahore Press Club - program placed on the surveyed levels



Zoning by level

- 0' to +4'**
flat base forum, Press Club, print yard, admin
- +4' to +12'**
gentle S slope library, auditorium, civic, NE bars
- +12' to +28'**
steep flanks: landscape + existing stairs only
- +28' top**
plateau: open public forum (nothing new built)

Rules

- no regrading buildings sit on the flat base or step on piers
- keep Press Club, tie it to Forum (W) + media (N)
- public climbs the existing stairs to an open top

KEY

- PUBLIC / CIVIC
- KNOWLEDGE
- MEDIA / PRODUCTION
- ARCHIVE (protected)
- LEARNING
- ADMIN / SERVICE
- LANDSCAPE / SLOPES
- OPEN SUMMIT
- PUBLIC FLOW
- STAFF / JOURNALISTS
- SERVICE
- EXISTING (retained)

base: Shimla Pahari survey (levels, Press Club)